

DG4000 series Waveform Generators

- Maximum output frequency:160 MHz, 100 MHz, 60 MHz
- 500MSa/s sample rate, 14 bits vertical resolution
- Dual Channel Outputs With Identical Performance
- 2ppm High-frequency Stability
- -115dBc/Hz Low Phase Noise
- Versatile Analog and Digital Modulation functions
- Built-in 150 Waveforms
- Built-in 7digits/s, 200MHz Counter
- 16th Harmonic Generation Function(Std.)
- Powerful Waveform Editing PC Software
- Connectivity: USB Host & Device, LAN
- 7 Inch LCD Display (800x480)

DG4000 series is a multifunctional generator that combines many functions in one, including Function Generator, Arbitrary Waveform Generator, Pulse Generator, Harmonic Generator, Analog/Digital Modulator and Counter. All of the 3 models have two channels with complete equivalent functions and precisely phase adjustable, they are the real dual-channel signal generator.




DG4000 Series Waveform Generators




Product Dimensions: Width X Height X Depth=313 mm ×160.7 mm×116.7 mm Weight:3.2kg(Without Package)


Advanced functions

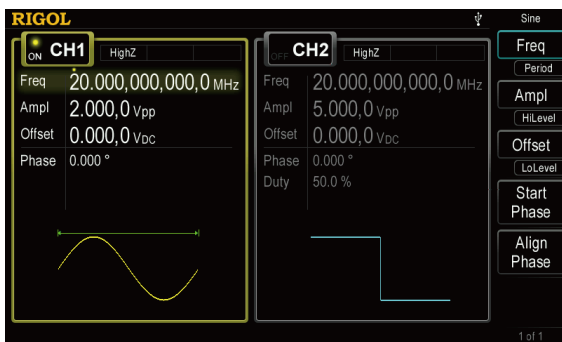


Standard identical 2 channels with frequency and phase coupling

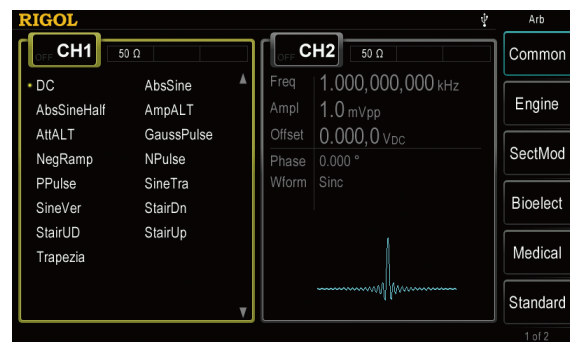


Arbitrary waveform function and built-in 150 waveforms

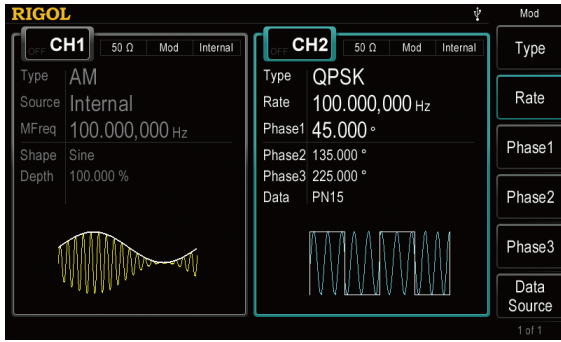

Abundant analog and digital modulation functions

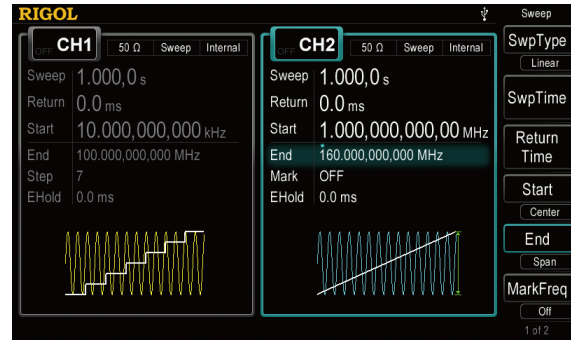


Various Sweep modes

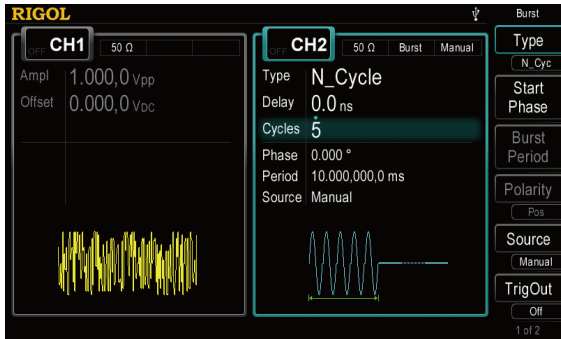


Noise and Burst modes



Up to 16 orders customized Harmonic generation function

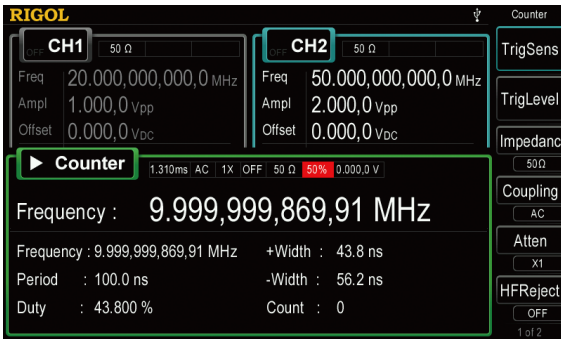

Standard high resolution counter function

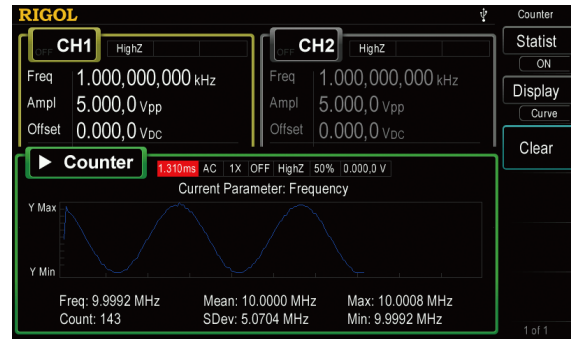

The statistic analysis function of counter

► Specification

All the specifications can be guaranteed if the following two conditions are met unless where noted.

- The generator is within the calibration and has performed self-calibration.
- The generator has been working continuously for 30 minutes at specified temperature (18°C ~ 28°C).

All the specifications are guaranteed unless those marked with "typical".

Model	DG4162	DG4102	DG4062
Channel	2	2	2
Maximum Frequency	160MHz	100 MHz	60 MHz
Sample Rate	500 MSa/s		

Waveforms	
Standard waveforms	Sine, Square, Ramp, Pulse, Noise, Harmonics
Arbitrary Waveforms	150 kinds, including Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, HaverSine, Lorentz, Dual-Tone, DC, etc.

Frequency Characteristics			
Sine	1 μ Hz to 160 MHz	1 μ Hz to 100 MHz	1 μ Hz to 60 MHz
Square	1 μ Hz to 50 MHz	1 μ Hz to 40 MHz	1 μ Hz to 25 MHz
Ramp	1 μ Hz to 4MHz	1 μ Hz to 3 MHz	1 μ Hz to 1 MHz
Pulse	1 μ Hz to 40 MHz	1 μ Hz to 25 MHz	1 μ Hz to 15 MHz
Harmonic	1 uHz to 80 MHz	1 uHz to 50 MHz	1 uHz to 30 MHz
Noise (-3dB)	120 MHz Bandwidth	80 MHz Bandwidth	60 MHz Bandwidth
Arb	1 μ Hz to 40 MHz	1 μ Hz to 25 MHz	1 μ Hz to 15 MHz
Resolution	1 μ Hz		
Accuracy	\pm 2ppm, 18 °C至28 °C		

Sine Wave Spectrum Purity	
Harmonic Distortion	Typical (0dBm) DC-1MHz: <-60dBc 1MHz-10MHz: <-55dBc 10MHz-100MHz: <-50dBc 100MHz-160MHz: <-40dBc
Total Harmonic Distortion Spurious (non-harmonic)	<0.1%(10Hz-20kHz,0dBm)
Phase Noise	Typical(0dBm) \leq 10MHz <-65dBc >10MHz <-65dBc+6dB/octave Typical (0 dBm, 10 kHz deviation) 10 MHz: \leq -115 dBc/Hz

Signal Characteristics			
Square	Typical (1Vpp)		
Rise/Fall Time	<8 ns	<10 ns	<12 ns
Overshoot	Typical (1Vpp) <3%		
Duty Cycle	\leq 10 MHz: 20.0% to 80.0% 10 MHz-40 MHz: 40.0% to 60.0% >40 MHz: 50.0% (fixed)		
Non-symmetry	1% of period + 5ns		
Jitter (rms)	Typical (1MHz, 1Vpp, 50 Ω) \leq 5MHz 2ppm+500 ps > 5MHz 500ps		
Ramp	Linearity: \leq 1% of peak output (Typical, 1kHz, 1 VPP, 100% Symmetry) Symmetry: 0% to 100%		
Pulse	Period: 25 ns to 1000000 s Pulse Width: \geq 10ns Leading/Trailing Edge Time: \geq 5ns Overshoot: Typical (1Vpp) <3%		
Jitter (rms)	Typical (1Vpp) \leq 5MHz 2ppm+500 ps > 5MHz 500ps		
Arb	Waveform Length: 16k points Vertical Resolution: 14 bits Sample Rate: 500M Sa/s Minimum Rise/Fall Time: Typical (1Vpp) <5 ns		
Jitter (rms)	Typical (1Vpp) \leq 5MHz 2ppm+500 ps > 5MHz 500ps	Harmonic	Harmonic Order: \leq 16 Harmonic Type: Even, Odd, All, User Harmonic Amplitude: can be set for all the harmonics Harmonic Phase: can be set for all the harmonics
Interpolation Method	Close, Linear		
Edit Method	Edit Point, Edit Block		

Output Characteristics			
Amplitude (into 50 Ω)			
Range	≤20MHz: 1mVpp to 10Vpp ≤60MHz: 1mVpp to 5Vpp ≤120MHz: 1mVpp to 2.5Vpp ≤160MHz: 1mVpp to 1Vpp	≤20MHz: 1mVpp to 10Vpp ≤60MHz: 1mVpp to 5Vpp ≤100MHz: 1mVpp to 2.5Vpp	≤20MHz: 1mVpp to 10Vpp ≤60MHz: 1mVpp to 5Vpp
Accuracy	Typical (1kHz Sine, 0V Offset, >10mVpp, Auto) ± 1% of setting ± 2mVpp		
Amplitude Flatness (relative to 1 kHz Sine wave, 500mVpp, 50Ω)	Typical ≤10MHz: ±0.1dB ≤60MHz: ±0.2dB ≤100MHz: ±0.4dB ≤160MHz: ±0.8dB	Typical ≤10MHz: ±0.1dB ≤60MHz: ±0.2dB ≤100MHz: ±0.4dB	Typical ≤10MHz: ±0.1dB ≤60MHz: ±0.2dB
Units	Vpp, Vrms, dBm		
Resolution	1 mV or 3 bit		
Offset (into 50 Ω)			
Range	±5 Vpk ac + dc		
Accuracy	± (1% of setting + 5mV + 0.5% of amplitude)		
Waveform Output			
Impedance	50 Ω (Typical)		
Protection	Short-circuit protection, automatically disables main output when overload relay		

Modulation Characteristics	
Modulation Types	AM, FM, PM, ASK, FSK, PSK, BPSK, QPSK, 3FSK, 4FSK, OSK, PWM
AM	
Carrier Waveforms	Sine, Square, Ramp, Noise, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb
Depth	0% to 120%
Modulating Frequency	2mHz~50kHz
FM	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb
Modulating Frequency	2mHz~50kHz
PM	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb
Phase Deviation	0° to 360°
Modulating Frequency	2mHz~50kHz
ASK	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Square with 50% duty cycle
Key Frequency	2 mHz~1 MHz
FSK	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Square with 50% duty cycle
Key Frequency	2 mHz~1 MHz
3FSK	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal
Modulating Waveforms	Square with 50% duty cycle
Key Frequency	2 mHz~1 MHz
4FSK	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal

Modulating Waveforms	Square with 50% duty cycle		
Key Frequency	2 MHz ~ 1 MHz		
PSK			
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)		
Source	Internal/External		
Modulating Waveforms	Square with 50% duty cycle		
Key Frequency	2 MHz ~ 1 MHz		
BPSK			
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)		
Source	Internal		
Modulating Waveforms	Square with 50% duty cycle		
Key Frequency	2 MHz ~ 1 MHz		
QPSK			
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)		
Source	Internal		
Modulating Waveforms	Square with 50% duty cycle		
Key Frequency	2 MHz ~ 1 MHz		
OSK			
Carrier Waveform	Sine		
Source	Internal/External		
Oscillation Time	8ns ~ 200s		
Key Frequency	2 MHz ~ 1 MHz		
PWM			
Carrier Waveform	Pulse		
Source	Internal/External		
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb		
Width Deviation	0% to 100% of Pulse Width		
Modulating Frequency	2mHz ~ 50kHz		
ExtTrig Input			
Input Range	75mVRMS ~ ±2.5Vac+dc		
Input Bandwidth	5MHz		
Input Impedance	100Ω		
Burst Characteristics			
Carrier Waveforms	Sine, Square, Ramp, Pulse, Noise, Arb (except DC)		
Carrier Frequency	2mHz to 100 MHz	2mHz to 100 MHz	2mHz to 60 MHz
Burst Count	1 to 1 000 000 or Infinite		
Start/Stop Phase	0° to 360°		
Internal Period	2μs to 500 s		
Gated Source	External Trigger		
Trigger Source	Internal, External or Manual		
Trigger Delay	0 ns to 85 s		
Sweep Characteristics			
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)		
Type	Linear, Log or Step		
Direction	Up or Down		
Start/Stop Frequency	1 μHz to 160 MHz	1 μHz to 100 MHz	1 μHz to 60 MHz
Sweep Time	1 ms to 300 s		
Hold/Return Time	0 ms to 300 s		
Trigger Source	Internal, External or Manual		
Marker	Falling edge of Sync signal (programmable)		
Counter Specifications			
Function	Frequency, Period, Positive/Negative Pulse Width, Duty Cycle		
Freqcy Resolution	7 digits/second (Gate Time =1s)		
Freqcy Range	1uHz to 200MHz		
Period Range	5ns to 16 days		
Voltage Range and Sensitivity (Not modulation signal)			
DC Coupling	DC Offset Range	±1.5VDC	Input Attenuation: "closed"
	1uHz ~ 100MHz	50mVRMS ~ ±2.5Vac+dc	

AC Coupling	100MHz~200MHz	100mVRMS~±2.5Vac+dc
	1uHZ~100MHz	50mVRMS~±2.5Vpp
	100MHz~200MHz	100mVRMS~±2.5Vpp

Pulse Width and Duty Cycle Measure

Freqcy/Amplitude Range	1uHZ~25MHz	50mVRMS~±2.5Vac+dc	DC Coupling
Pulse Width	Minimum	≥20ns	Input Attenuation:
	Resolution	2ns	“closed”
Duty Cycle	Range (Display)	0%~100%	

Input Characteristics

Input Range	Brakdown Voltage	±7Vac+dc (Attenuation: closed)	Impedance=1MΩ
		±70Vac+dc(Attenuation: open)	
		5Vrms	
Input Adjustment	Attenuation	Open: “×10”; Closed: “×1”	
	Impedance	50Ω	1MΩ
	Coupling	AC	DC
Input Trigger	HF Reject	ON: input bandwidth=250KHz; OFF: input bandwidth=225MHz	
	Trigger Level Range	-2.5V to +2.5V	
	Trigger Sensitivity Range	0% (140mV hysteresis voltage) to 100% (2mV hysteresis voltage)	
Gate Time	GateTime1	1ms	
	GateTime2	10ms	
	GateTime3	100ms	
	GateTime4	1s	
	GateTime5	10s	
	GateTime6	>10s	

Trigger Characteristics

Trigger Input	
Level	TTL-compatible
Slope	Rising or falling (selectable)
Pulse Width	> 50 ns
Latency	Sweep: <100 ns (typical) Burst: <300 ns (typical)

Trigger Output

Level	TTL-compatible
Pulse Width	> 60 ns (typical)
Maximum Rate	1MHz

Clock Reference

Phase Offset	
Range	0° to 360°
Resolution	0.03°
External Reference Input	
Lock Range	10 MHz ± 50 Hz
Level	250 mVpp to 5 Vpp
Lock Time	< 2 s
Impedance (Typical)	1kΩ, AC coupling

Internal Reference Output

Frequency	10 MHz ± 50 Hz
Level	3.3Vpp
Impedance (Typical)	50kΩ, AC coupling

Sync Output

Level	TTL-compatible
Impedance	50 Ω, nominal value

General Specifications

Power	
Power Voltage	100V~240V (45Hz~440Hz)
Power Consumption	Less than 50 W
Fuse	250V, T2A
Display	
Type	7-inch TFT LCD
Resolution	800 Horizontal × RGB × 480 Vertical Resolution
Color	16M color
Environment	
Temperature Range	Operating: 10 C to 40 C Non-Operating: -20 C to 60 C
Cooling Method	Cooling by fans compulsively

Humidity Range	Less than 35 C: ≤90% Relative Humidity (RH) 35 C to 40 C: ≤60% Relative Humidity (RH)
Altitude	Operating: Less than 3000 meters Non-Operating: Less than 15000 meters
Mechanical	
Dimensions (W×H×D)	313 mm ×160.7 mm×116.74mm
Weight	with no package: 3.2 kg with package: 4.5 kg
Interfaces	
USB Host (2), USB Device, LAN	
IP Protection	
IP2X	
Calibration Interval	
Recommend 1 year for standard interval	

► Ordering Information

	Description	Order Number
Model	DG4162 (160 MHz, dual-channel)	DG4162
	DG4102 (100 MHz, dual-channel)	DG4102
	DG4062 (60 MHz, dual-channel)	DG4062
Standard	Power Cord	-
Accessories	USB Cable	CB-USB
	BNC Cable (1 meter)	CB-BNC-BNC-1
	Quick Guide (Hard Copy)	-
	Resource CD (including User's Guide and Application Software)	-
Optional Accessories	DG4 PC Software(Advanced functions)	Ultra Station-adv
	40 dB Attenuator	RA5040K
	Rack Mount Kit	RM-DG4000
	Soft Carrying bag	BAG-G1

Warranty

Three-year warranty(Excluding accessories).

RIGOL



Headquarter

RIGOL TECHNOLOGIES, INC.
No.156,Cai He Village,
Sha He Town,
Chang Ping District, Beijing,
102206 P.R.China
Tel:+86-10-80706688
Fax:+86-10-80705070
Email: info@rigol.com

USA

RIGOL TECHNOLOGIES
USA,INC.
7401 First Place,Suite N
Oakwood Village
OH 44146,USA
Tel/Fax: 440-232-4488
Toll free: 877-4-RIGOL-1
Email: info@rigol.com

Europe

RIGOL TECHNOLOGIES EU,
GmbH
Lindbergh str. 4
82178 Puchheim, Germany
Tel: +49(0)89-8941895-0
Email: info-europe@
rigoltech.com

RIGOL® is the registered trademark of RIGOL Technologies, Inc. Product information in this document subject to update without notice. For the latest information about RIGOL's products, applications and services, please contact local RIGOL office or access RIGOL official website:

www.rigol.com

August,2013